


## Valve general information

## Dimensional data

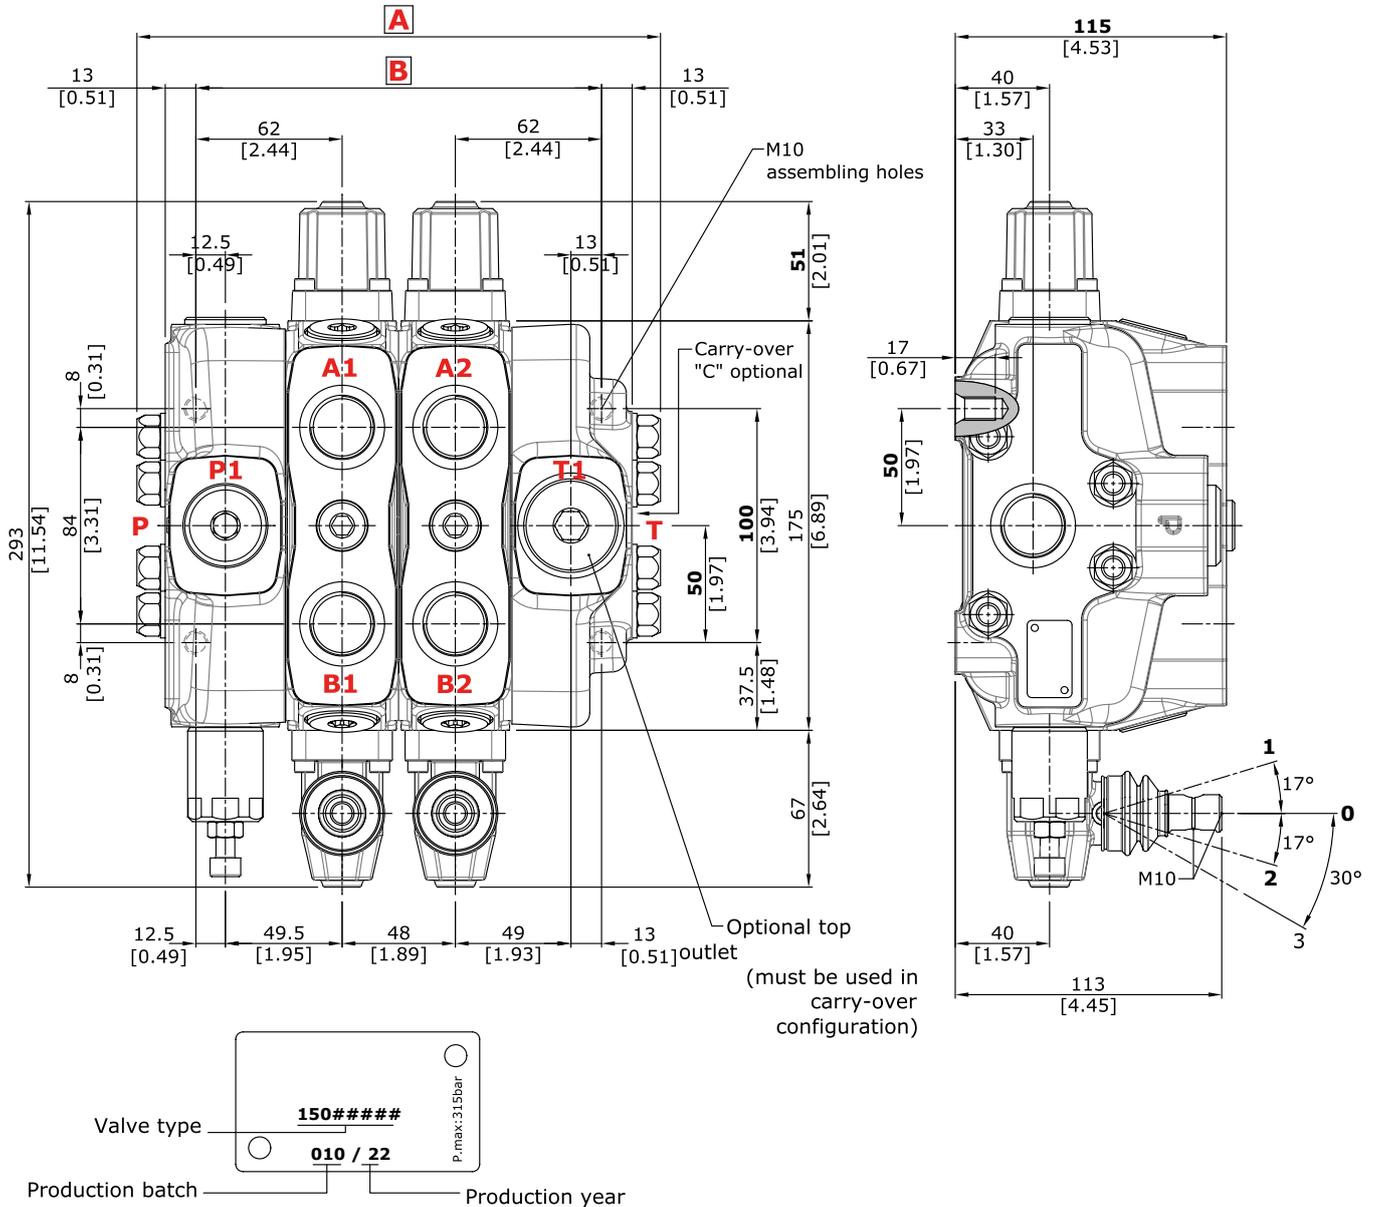

TYPE	A		B		Weight	
	mm	in	mm	in	Kg	lb
150L GS16/1	174	6.85	124	4.88	13	28.7
150L GS16/2	222	8.74	172	6.77	18.5	40.8
150L GS16/3	270	10.63	220	8.66	24	52.9
150L GS16/4	318	12.52	268	10.55	29.5	65
150L GS16/5	366	14.41	316	12.44	35	77.2
150L GS16/6	417	16.42	364	14.33	40.5	89.3

TYPE	A		B		Weight	
	mm	in	mm	in	Kg	lb
150L GS16/7	463	18.23	412	16.22	46	101.4
150L GS16/8	510	20.08	460	18.11	51.5	113.5
150L GS16/9	558	21.97	508	20.00	57	125.7
150L GS16/10	606	23.86	556	21.89	62.5	137.8
150L GS16/11	654	25.75	604	23.78	68	149.9
150L GS16/12	702	27.64	652	25.67	73.5	162

NOTE - Drawings and dimensions are referred to **BSP** thread configuration.