

Inlet section

Inlet valve options

Unloader valves

Description example: AC (X - 100) **ELN** - 12VDC


Hydraulic operated valve: **L**
 Solenoid operated valve: **ELN**
ELP
ELT

Feeding voltage:
 for solenoid operated

Solenoid operated

Emergency with push button and spring return; for detent position turn the button after press it.

WARNING: the manual override option is intended for emergency use, not for continuous duty operation.

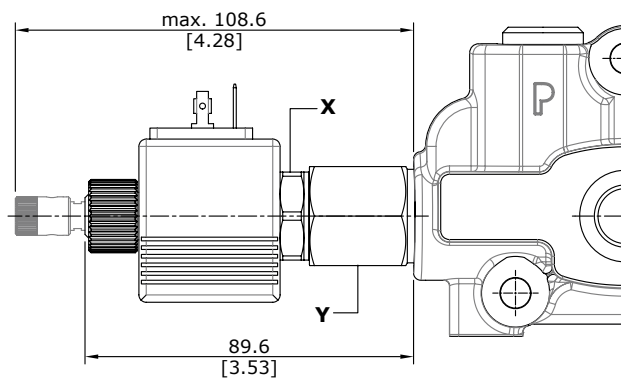

Wrenches and tightening torques

X = wrench 24 - 35 Nm (26 lbf·ft)

Y = wrench 27 - 42 Nm (31 lbf·ft)

