


8MG3(NO) type (30 07 5319)

With spring return in neutral position and microswitch operated in both directions.

Also available **8MG1(NO)** (microswitch operated in position 1) and **8MG2(NO)** (microswitch operated in position 2) configurations; dimension are the same of **8MG3(NO)** configuration.

Same configurations are available with normally closed (NC) contact.

For more information contact Sales Department.

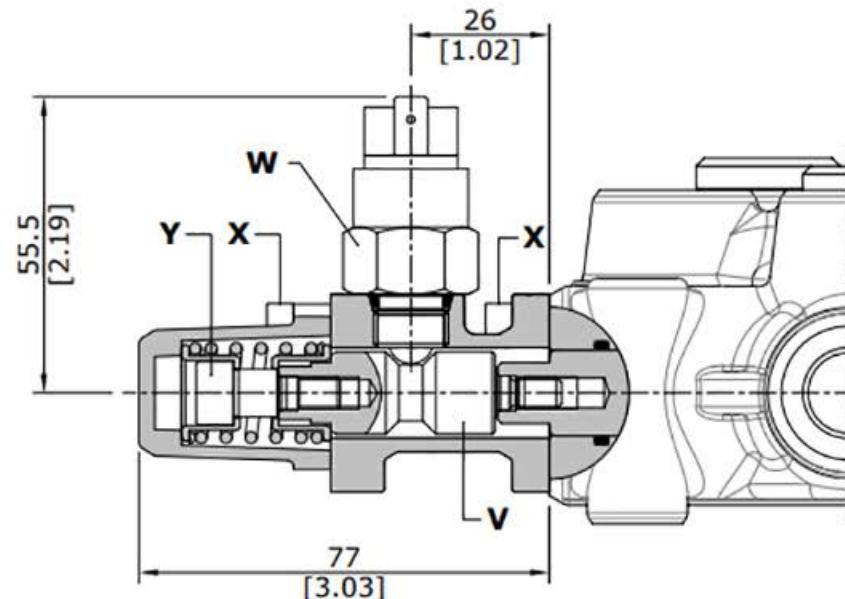

Wrenches and tightening torques

X = allen wrench 4 - 6 Nm (4.4 lbft)

Y = allen wrench 6 - 9 Nm (6.6 lbft)

W = wrench 22 - 42 Nm (31 lbft)


V = wrench 10 - 9.8 Nm (7.2 lbft)

Operating features

MICROSWITCH

Mechanical life : 5×10^5 operations

Electrical life (resistive load) : 5×10^4 operations 10A / 12VDC

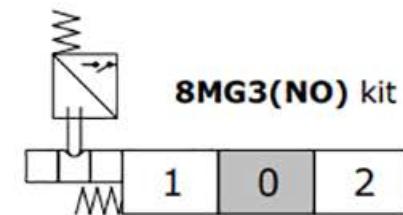

Other configurations

