

"A" side spool positioners


ON/OFF pneumatic kit and proportional pneumatic kit

ON/OFF pneumatic: 8P type (**30 07 5399**)

Prop

With spring return to neutral position.

With s

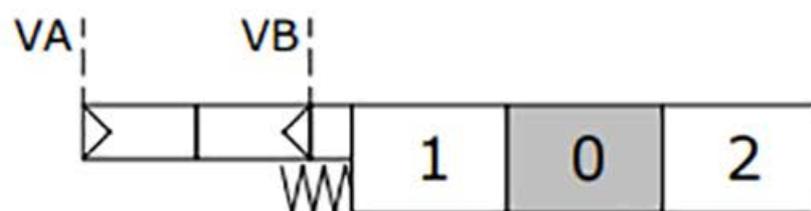


Wrenches and tig

X = allen wrench 4

W = wrench 17 - 2

V = wrench 13 - 9

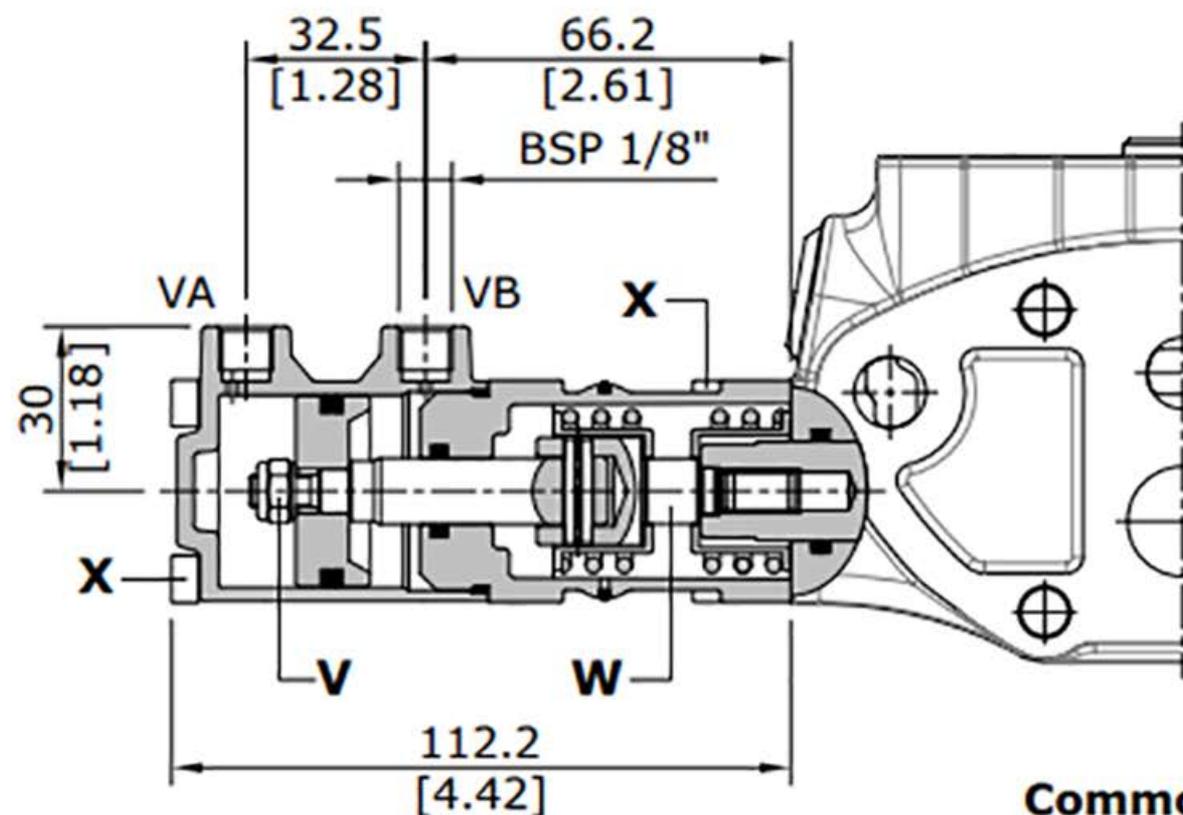

Common features

Pilot pressure.....: min. 5.5 bar

: max. 10 bar