


MR HYDRAULIC MOTORS





MR Series - (Geroler)

Shaft Ø25mm
Sae 'A' 2 Bolt Type Flange
Built In Check Valves
With Drain Line

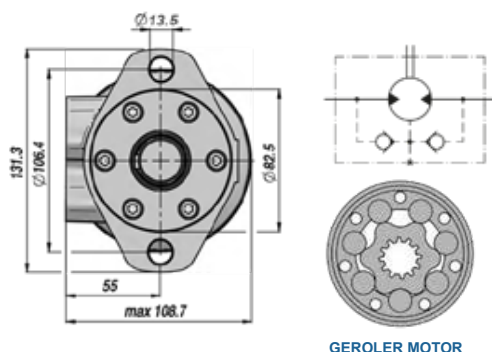


GEROLER MOTOR

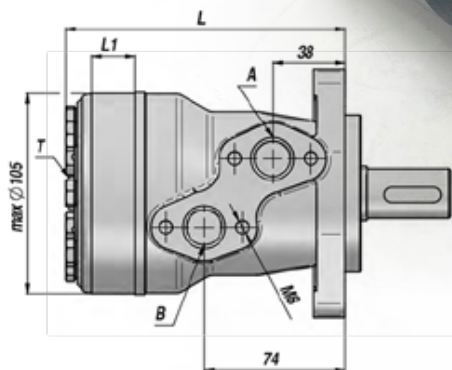



Order Code	Displacement (C.C/REV)	Max Speed (RPM)	Max Oil Flow (Ltr/MIN)	Max Torque (NM)	Max Pressure Inlet (BAR)	Max Pressure Drop (BAR)	A-B (BSP)	T (BSP)	L (mm)	L1 (mm)	Weight KG
HP-MR-50	51.7	775	40	93	175	140	1/2"	1/4"	142	9	6.5
HP-MR-80	80.5	750	60	152					147	14	6.9
HP-MR-100	100.5	600		194					150.5	17.5	7
HP-MR-125	126.3	475		237					155	22	7.3
HP-MR-160	160.8	375		310		161			28	7.5	
HP-MR-200	200.9	300		369		168			35	8	
HP-MR-250	252.6	240		380		110			177	44	8.5
HP-MR-315	321.5	190		380		90			189	56	9
HP-MR-400	403.9	160		380		70			203	70	11

Table above shows continuous work specifications.

MAX RETURN PRESSURE WITHOUT DRAIN

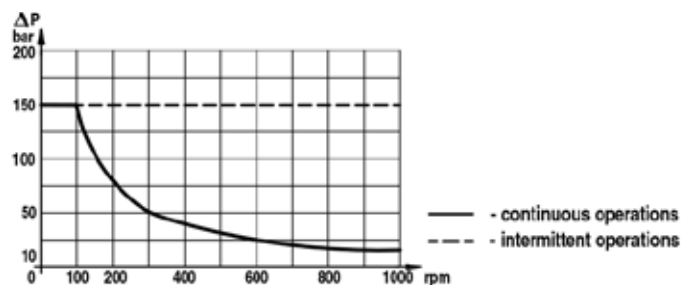

PERMISSIBLE SHAFT LOADS

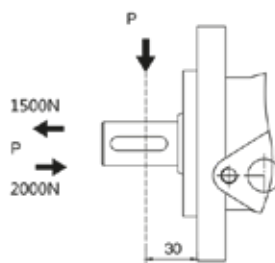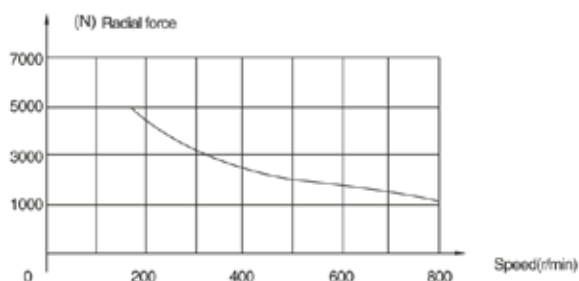

DIRECTION OF SHAFT ROTATION

