

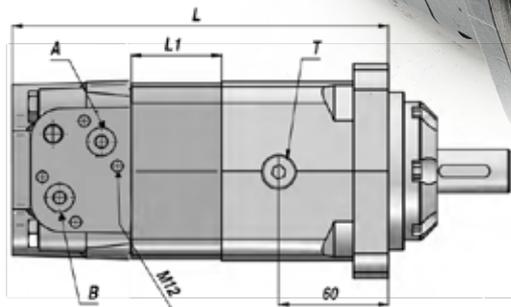




MV HYDRAULIC MOTORS

MV Series - (Geroler)

Shaft Ø50mm
 4 Bolt Type Flange
 Built In Check Valves
 With Drain Line

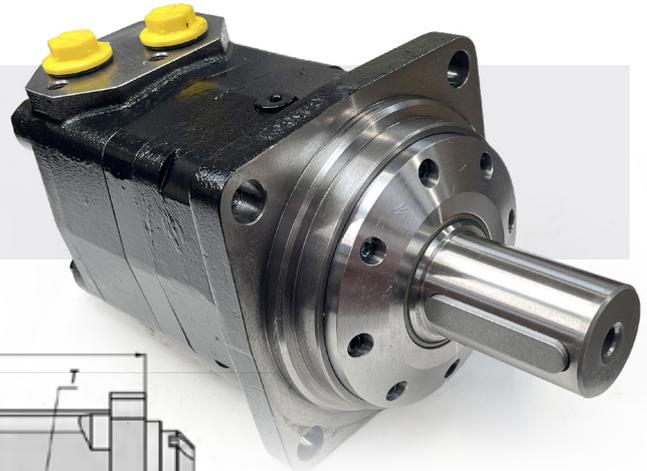


GEROLER MOTOR


Order Code	Displacement (C.C/REV)	Max Speed (RPM)	Max Oil Flow (Ltr/MIN)	Max Torque (NM)	Max Pressure Inlet (BAR)	Max Pressure Drop (BAR)	A-B (BSP)	T (BSP)	L (mm)	L1 (mm)	Weight KG
HP-MV-315	314.9	475	150	873	240	200	1"	1/4"	214	19	30.7
HP-MV-400	399.7	375		1108					221	26	31.5
HP-MV-500	496.6	300		1385					229	34	32.4
HP-MV-630	617.8	238		1570					239	44	33.6
HP-MV-800	787.4	187		1773					253	58	35.2
HP-MV-1000	969.1	154		1900					268	73	37.2

Table above shows continuous work specifications.


MAX RETURN PRESSURE WITHOUT DRAIN

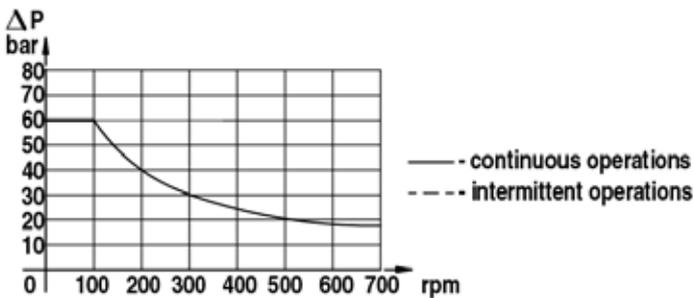

DIRECTION OF SHAFT ROTATION

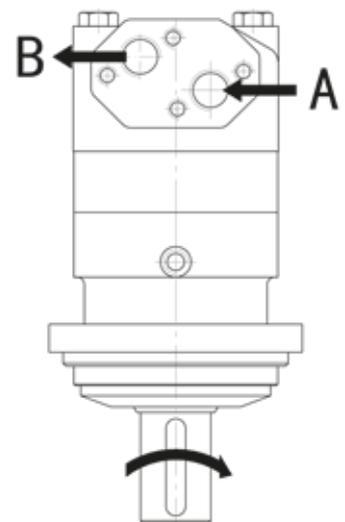

PERMISSIBLE SHAFT LOADS

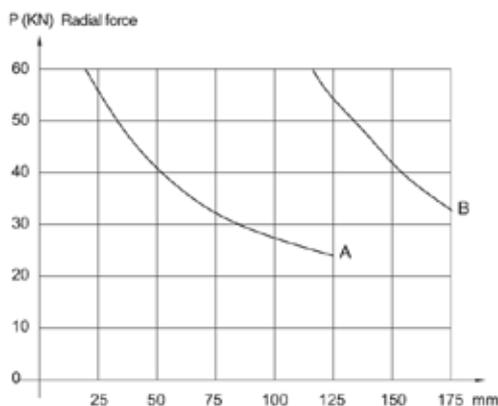

A—BM5
 B—BM5W

