


T15

For excavators 10.0-25.0 ton



MZ

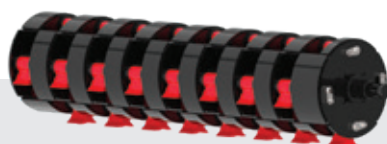

FR



DF



HF6
Ø max 8 cm
STANDARD EQUIPMENT



HF11 (FR130)
HF13 (FR160)
Ø max 25 cm
STANDARD EQUIPMENT



HF14
Ø max 25 cm
STANDARD EQUIPMENT



KF7
Ø max 6 cm



HF10 (FR130)
HF12 (FR160)
Ø max 25 cm



HF15
Ø max 20 cm

		T15 MZ130	T15 MZ160	T15 FR130	T15 FR160	T15 DF130	T15 DF160
	ton	10.0 – 25.0	12.0–25.0	12.0–25–0	15.0–25.0	12.0–25.0	16.0–25.0
	cm/inch	130 52	160 63	130 52	160 63	130 52	160 63
	cm/inch	160x80x85 63x32x34	190x80x85 75x32x34	160x80x85 63x32x34	190x80x85 75x32x34	160x80x85 63x32x34	190x80x85 75x32x34
	kg/lbs	650 1.433	750 1.653	920 2.028	1.020 2.249	950 2.094	1.050 2.315
	cc	32/64	32/64	32/64	32/64	32/64	32/64
	oil - L/min (gal/min)	90–180 25–50	90–180 25–50	90–180 25–50	90–180 25–50	90–180 25–50	90–180 25–50
	bar/psi (min-max)	200–250 2.900–3.600	200–250 2.900–3.600	200–250 2.900–3.600	200–250 2.900–3.600	200–250 2.900–3.600	200–250 2.900–3.600
	transmission	1 (50 mm)	1 (50 mm)	1 (50 mm)	1 (50 mm)	1 (50 mm)	1 (50 mm)
	rotor diameter cm/inch	46 18	46 18	41 16	41 16	41 16	41 16
		20	20	26	32	36	42

Technical features and standard equipment

- Piston motor variable displacement (manual adjustment)
- MZ Helicoidal Rotor with hammers austempered and cutting blade interchangeable
- FR Forestal with 360° rotating hammer
- DF Forestal rotor, fixed teeth
- Toothed high-performance belts transmission
- Internally reinforced double-case body with interspace
- Protective belts cover
- Symmetric shearing head, for faster cut with rotation of the excavator
- Input and output mouths completely identical, adjustable
- Hydraulic frontal hood, fully openable for higher cutting capacity
- Inside Rotor Supports with "labyrinth" for the protection of the bearings from the impurities
- Adjustable bearings of 1st quality
- Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation
- Accident prevention chains protections according to EC directives

Accessories

- Mounting hitch (pins version) 8.1–12.0 ton
- Pins kit 8.1–12.0 ton
- Quick hitch 8.1–12.0
- Mounting hitch (pins version) 12,1–16,0 ton
- Pins kit 12,1–16,0 ton
- Mounting hitch (pins version) 16,1–25,0 ton
- Pins kit 16,1–25,0 ton
- Hoses kit Lg. 2,5 meters
- Front hood mechanical opening
- Rear hood hydraulic opening (simultaneously to front hood)
- Electrovalve for hydraulic hood