




DIN2353 DOUBLE ACTING PILOT CHECK VALVES, WITH ADJUSTABLE BANJO

VBDG are used to keep a double acting cylinder in its position, granting the load stop. This version has been manufactured for mounting of the valve with the pipe and adjustable banjo.


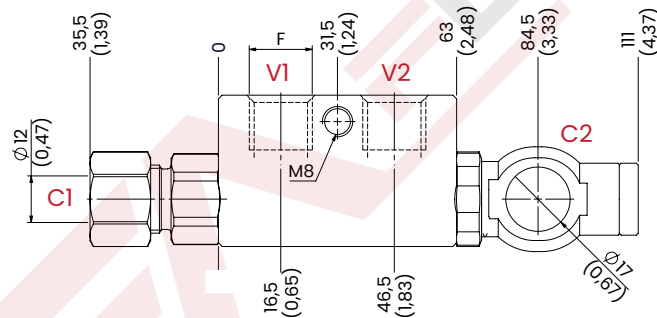


HYDRAULIC CIRCUIT



mm [Inches]

PERFORMANCES

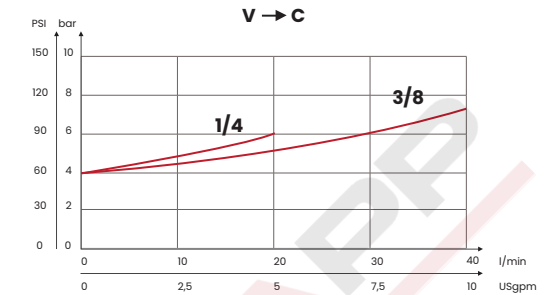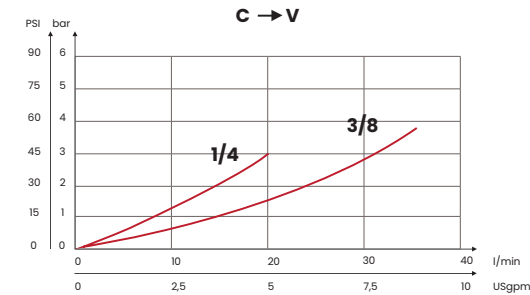**ORDERING CODE**

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	PILOT RATIO	CRACKING PRESSURE bar [PSI]	WEIGHT kg [lb]
FA5056	VBD1BG	1/4 BSPP	20 [5,3]	350 [5075]	1:5,5	4,5 [65]	0,67 [1,47]
FA5055	VBD2BG	3/8 BSPP	35 [9,2]				
Steel body							

Steel body