



DOUBLE COUNTERBALANCE VALVES FOR OPEN CENTER

BDA counterbalance valves (Gas thread) are used to keep a load locked, the built-in relief valve protects the system from overpressure in the cylinder by draining the oil.

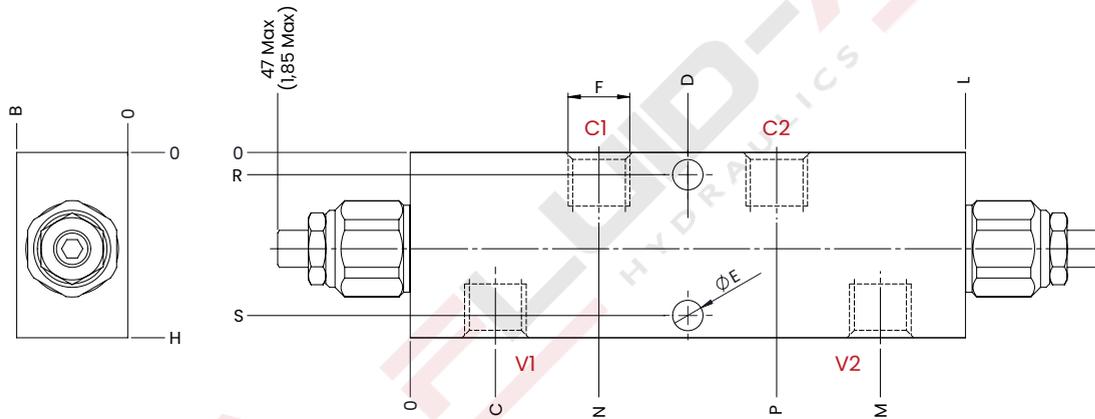

HYDRAULIC CIRCUIT


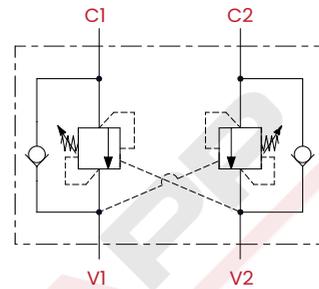


TECHNICAL CHARACTERISTICS

F	H	B	C	D	ØE	L	M	N	P	R	S
1/4 BSPP	50 [1,97]	30 [1,18]	23 [0,91]	75 [2,95]	8,2 [0,32]	150 [5,90]	127 [5]	51 [2,01]	99 [3,9]	6 [0,24]	44 [1,75]
3/8 BSPP			21 [0,83]							8,5 [0,33]	51,5 [2,03]
1/2 BSPP	60 [2,36]	40 [1,57]	26 [1,02]	105 [4,13]	10,5 [0,41]	210 [8,27]	184 [7,24]	71 [2,78]	139 [5,47]	9 [0,35]	61 [2,4]
3/4 BSPP	70 [2,75]									10 [0,39]	70 [2,75]
1 BSPP	80 [3,15]	50 [1,97]								10 [0,39]	70 [2,75]

Steel body (on request aluminium body)

PERFORMANCES

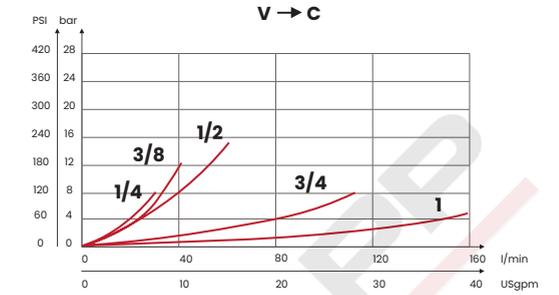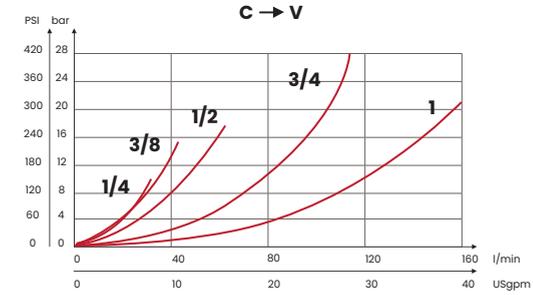

TAMPER PROOF CAP M10



CODE
62200021

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	STANDARD SETTING bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	PILOT RATIO	WEIGHT kg [lb]	
FA2001	BDA1B21	1/4 BSPP	30 [7,9]	350 [5075]	210 [3045]	30/210 [435/3045]	80 [1160]	1:4,25	1,80 [4]	
FA2002	BDA1B35				350 [5075]	60/350 [870/5075]	135 [1960]			
FA2003	BDA2B21	3/8 BSPP	40 [10,6]		210 [3045]	30/210 [435/3045]	80 [1160]		On request 1:8,1	1,72 [3,8]
FA2004	BDA2B35				350 [5075]	60/350 [870/5075]	135 [1960]			
FA2005	BDA3B21	1/2 BSPP	60 [15,9]		210 [3045]	30/210 [435/3045]	80 [1160]	1:6,2	2 [4,4]	
FA2006	BDA3B35				350 [5075]	60/350 [870/5075]	135 [1960]			
FA2007	BDA4B21	3/4 BSPP	110 [28,9]		210 [3045]	30/210 [435/3045]	70 [966]		On request 1:10,6	4,30 [9,46]
FA2008	BDA4B35				350 [5075]	60/350 [870/5075]	145 [2100]			
FA2009	BDA5B21	1 BSPP	160 [42,1]		210 [3045]	30/210 [435/3045]	70 [966]	On request 1:10,6	6,8 [15]	
FA2010	BDA5B35				350 [5075]	60/350 [870/5075]	145 [2100]			

Standard setting 350 bar [5075 PSI] to 5 l/m [1,32 USgpm] Standard setting 210 bar [3045 PSI] to 5 l/m [1,32 USgpm]