


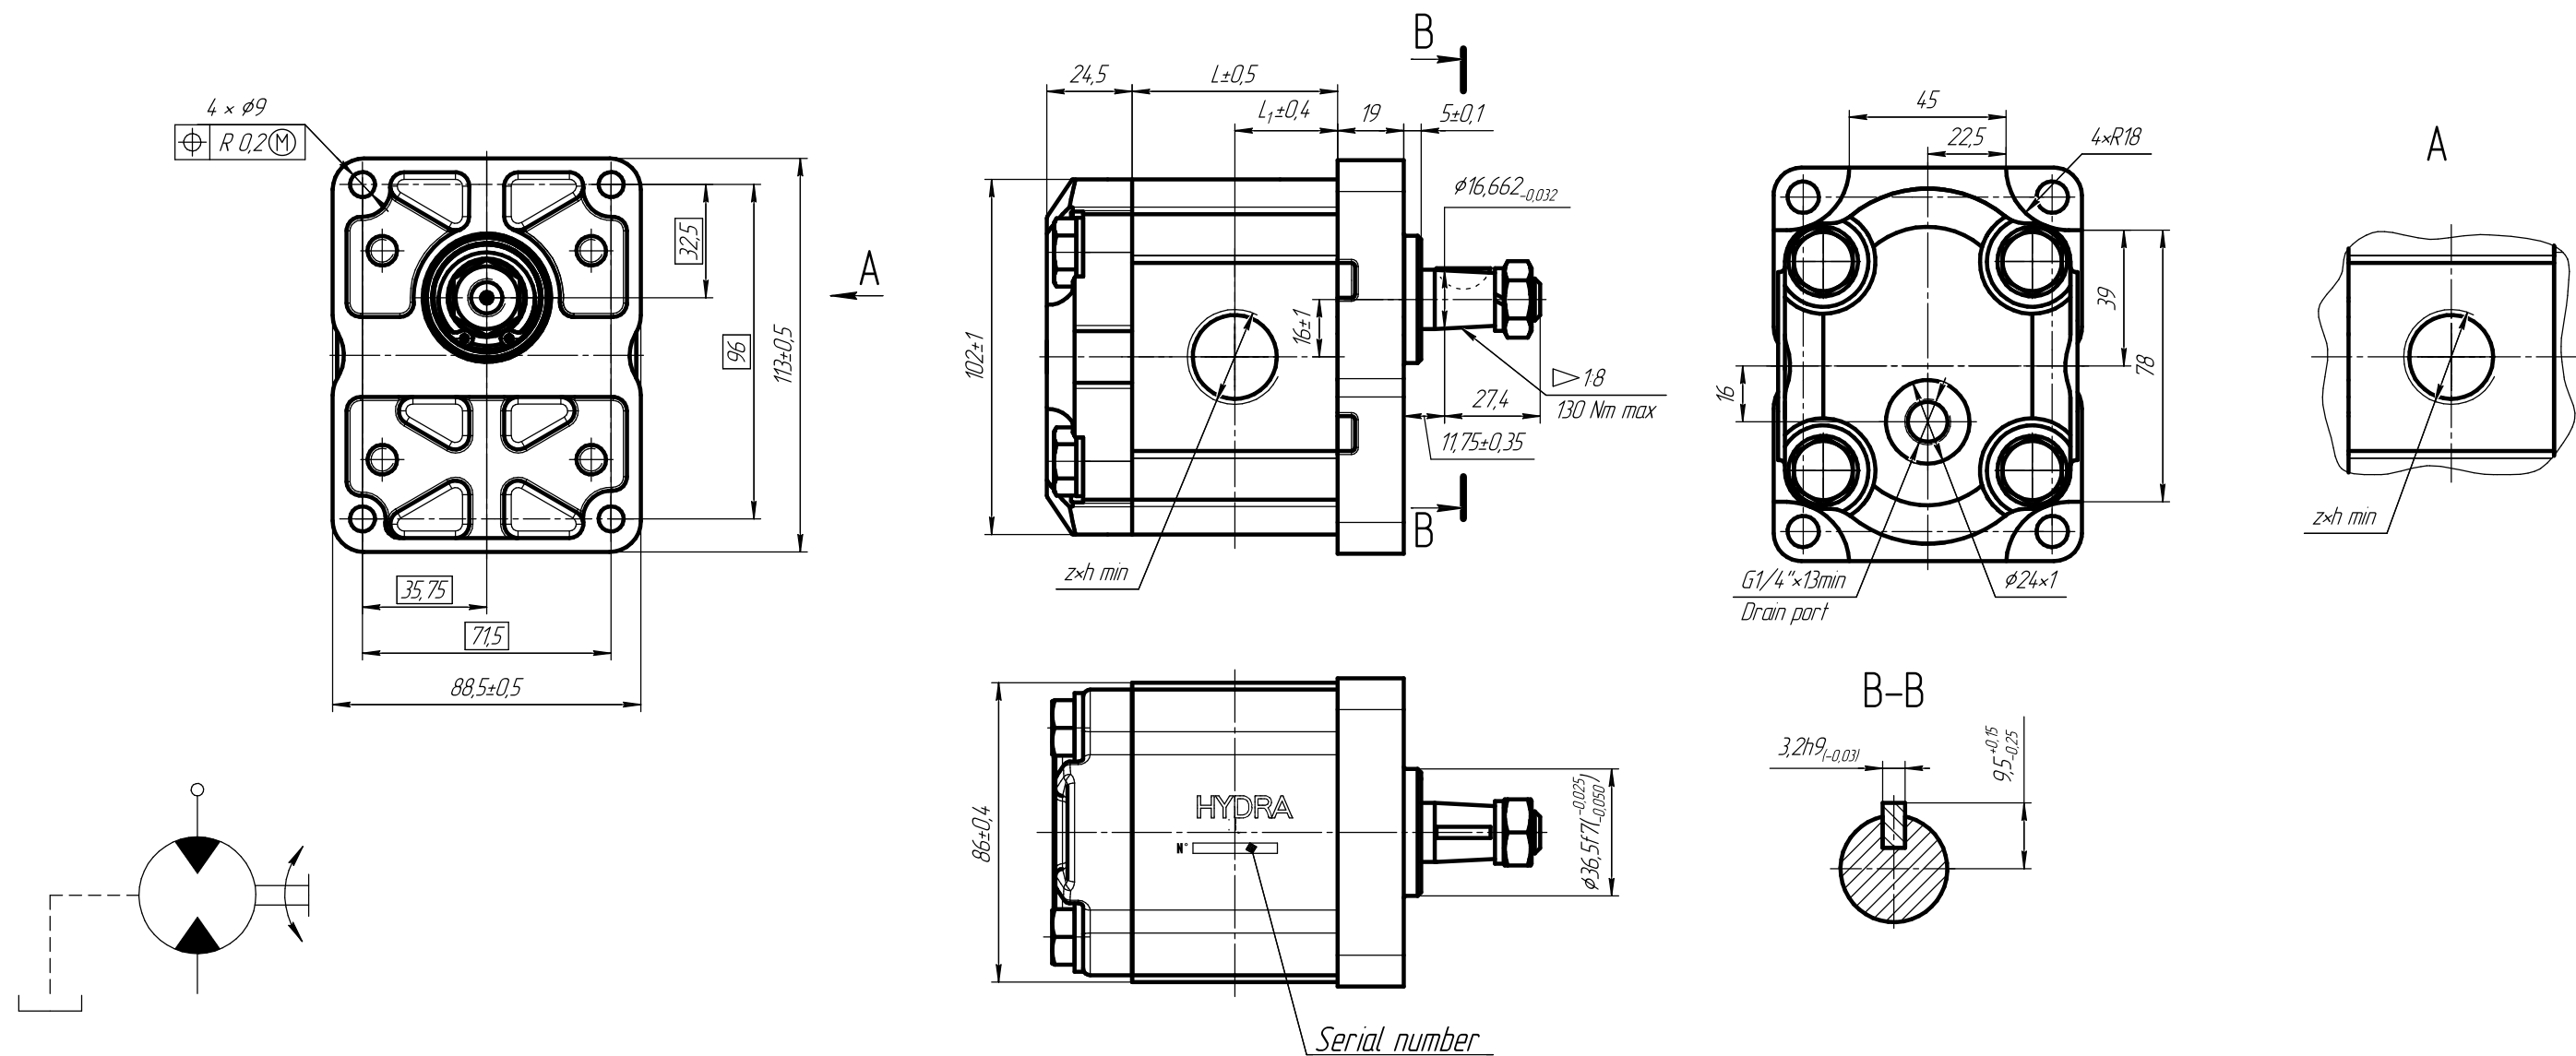

Motor type		Theoretical displacement, cm^3	Dimension, mm			Drain pressure, MPa		Maximum the inlet pressure, P_1 , bar	Rated frequency rotation, min^{-1}	Nominal consumption l/min	Output torque, Nm nominal	Output power, kW	Weight, kg	
			L	L_1	z×h min	Nominal	Maximum in start time							
GM2K6B-G262G	–	6,3	50,2	25,1	G 1/2-B×16	0,4	1,0	250	2400	16,8	20,06	5,6	2,4	
GM2K8B-G262G	–	8,2	53,2	26,6						22,1	26,1	7,4	2,5	
GM2K10B-G262G	–	10,0	56,0	28,0						26,9	31,8	8,9	2,6	
GM2K11B-G262G	–	11,3	58,0	29,0						30,47	35,9	10,1	2,7	
GM2K12B-G262G	–	12,5	59,8	29,9						33,7	39,8	11,2	2,7	
GM2K14B-G262G	–	14,0	62,1	31,05	G 3/4-B×19			0,4	1,0	1500	23,59	44,5	7,8	2,9
GM2K15B-G262G	–	15,0	63,7	31,85							25,3	47,7	8,4	2,9
GM2K16B-G262G	–	16,0	65,2	32,6							26,9	50,9	8,9	3,0
GM2K17B-G262G	–	17,0	66,9	33,45							28,6	54,1	9,5	3,0
GM2K19B-G262G	–	19,0	69,9	34,95							32,1	53,2	9,4	3,1
GM2K20B-G262G	–	20,0	71,4	35,7							33,7	53,5	9,4	3,1
GM2K23B-G262G	–	22,5	75,3	37,65							37,9	54,4	9,6	3,4
GM2K25B-G262G	–	24,8	78,8	39,4							41,8	57,3	9,47	3,6

GM2K6B-G262G Г4

Gear Motors