

INTERMERCATO®


HIGH PERFORMANCE LIFT & LOAD ATTACHMENTS



GRAPPLE SAWS

Reliability and efficiency

Take your *forestry* and *tree care* operations to the *next level*.

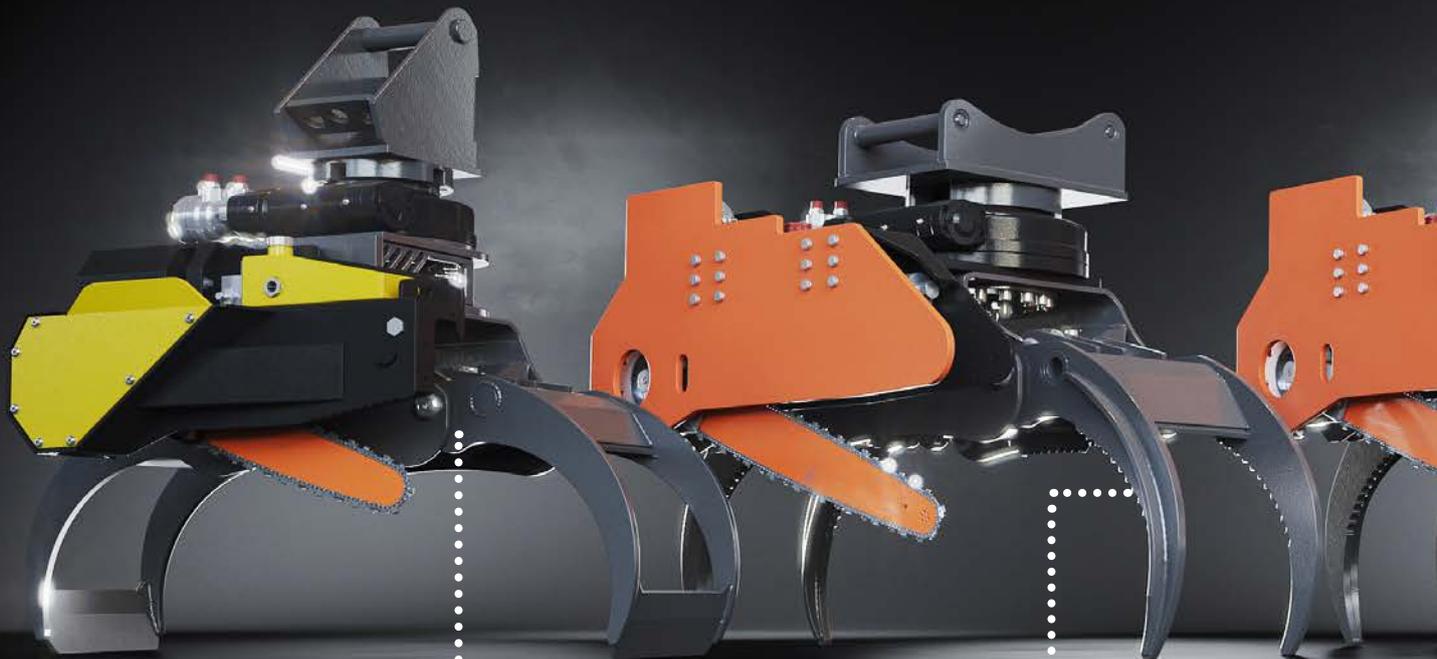

Maximum strength - Ideal weight. The brilliant combination of materials in our **GRX** grab series reduces weight while maintaining strength.

Claws with teeth or knives ensure a firm grip and no dangerous slipping of limbs.



FLEXIBILITY

Possibility to choose between log grab, 4-finger, 5-finger grab and universal grab.

Our grapple saws with a flexible universal hole pattern are built for tilt rotators with angled excavator attachments and for Intermercato WDR worm drive rotators.



SIMPLE AND RELIABLE

Fast and easy bar and chain replacement.

All that's needed to operate the saw cassette are feed and return lines.

INTERMERCATO®

HIGH PERFORMANCE LIFT & LOAD ATTACHMENTS

High performance worm drive rotators provide safety and accuracy while lowering limbs to the ground.

We make sure to match your new grapple saw to your machine with the right attachment.

Hardox® protection plate - No more worries hoses will get stuck and rip while working.

EFFICIENCY



Return feed system for the saw bar offers essentially self-adjusting sawing.

Proportional chain lubrication delivers improved cutting performance and reduces wear on drive sprockets, nose sprockets and chains.

SAFETY



Automatic (**Hultdins Supersaw**) rapid chain tensioning reduces vibration, enabling safe control by the operator.

Models equipped with **Hultdins Supersaw** have an extra protection plate made of **Hardox®**, protecting the hoses between the saw cassette and the grab.



Machine size **5-9 ton**

GRX Grab made of **Strenx**[®]
700 high strength
structural steel

Claws made of **Hardox**[®] **450**
wear-resistant steel

INTERLAM IT450
Saw cassette - made in Italy

PARKER motor

Automatic chain lubrication

Mechanical chain tensioning

Independent chain oil tank

Direct drive

GRAB OPTIONS



GRX 20 / Log Grab



GRX 20-4 / 4-Finger Grab



GRX 20-5 / 5-Finger Grab

ATTACHMENT OPTIONS



STANDARD
S 40
S 45
S 50



LEHNHOFF
SW03 45
SW08 45
Other models on request

**OTHER
ATTACHMENTS
ON REQUEST**

ROTATOR OPTIONS



WORM DRIVE ROTATOR
WDR 9 GS



TEETH OPTIONS



NO TEETH





WITH TEETH

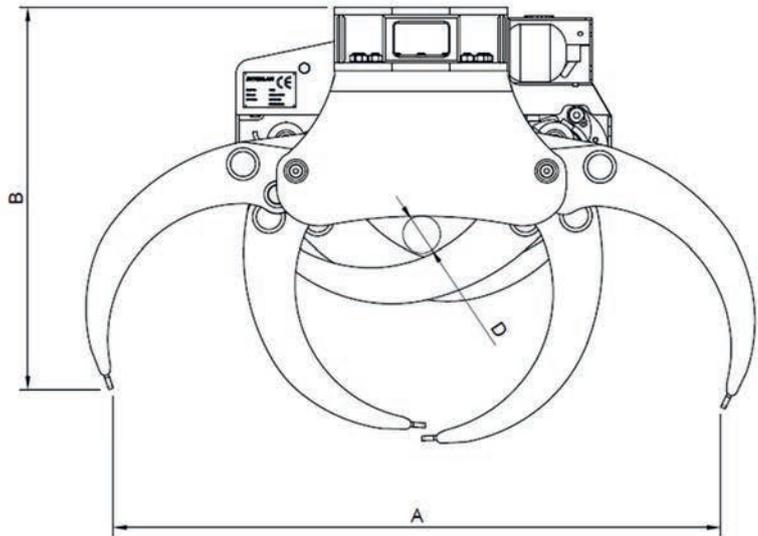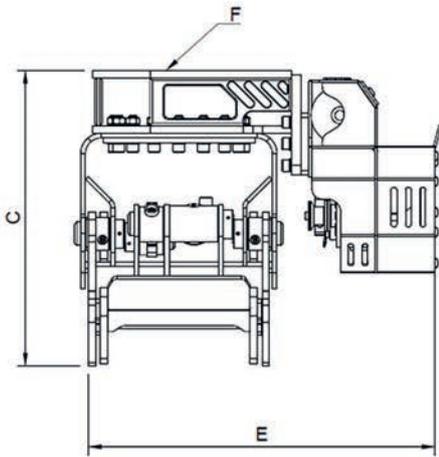

	A	B	C	D	E	F
IT450 GRX 20	1262	837	617	78	722	270 / 16 Ø17 Center Ø145
IT450 GRX 20-4	1234	820	617	78	722	270 / 16 Ø17 Center Ø145
IT450 GRX 20-5	1234	820	617	78	722	270 / 16 Ø17 Center Ø145

MODEL SPECIFICATIONS



MODEL	Kg	mm	Bar	ton	mm			mm	cm ³
IT450 GRX 20	287	1262	250	5-9	540	450	404"	2	6 cm ³
IT450 GRX 20 / Teeth	287	1262	250	5-9	540	450	404"	2	6 cm ³
IT450 GRX 20-4	285	1234	250	5-9	540	450	404"	2	6 cm ³
IT450 GRX 20-4 / Teeth	285	1234	250	5-9	540	450	404"	2	6 cm ³
IT450 GRX 20-5	292	1234	250	5-9	540	450	404"	2	6 cm ³
IT450 GRX 20-5 / Teeth	292	1234	250	5-9	540	450	404"	2	6 cm ³



Machine size **8-12 ton**

GRX Grab made of **Strenx**[®] 700 high strength structural steel

Claws made of **Hardox**[®] 450 wear-resistant steel

Protection plate made of **Hardox**[®] 450

HULTDINS SUPERSAW 550
Saw cassette - made in Sweden

PARKER motor

Automatic chain lubrication

Automatic chain tensioning

Integrated chain oil tank

Direct drive

GRAB OPTIONS



GRX 25 / Log Grab



GRX 25-4 / 4-Finger Grab



GRX 25-5 / 5-Finger Grab

ATTACHMENT OPTIONS



STANDARD
S 45
S 50
S 60



LEHNHOFF
SW08 45
Other models on request



OILQUICK
OQ60-5
Other models on request

**OTHER
ATTACHMENTS
ON REQUEST**

ROTATOR OPTIONS



WORM DRIVE ROTATOR
WDR 12 GS


TEETH OPTIONS



NO TEETH



WITH TEETH

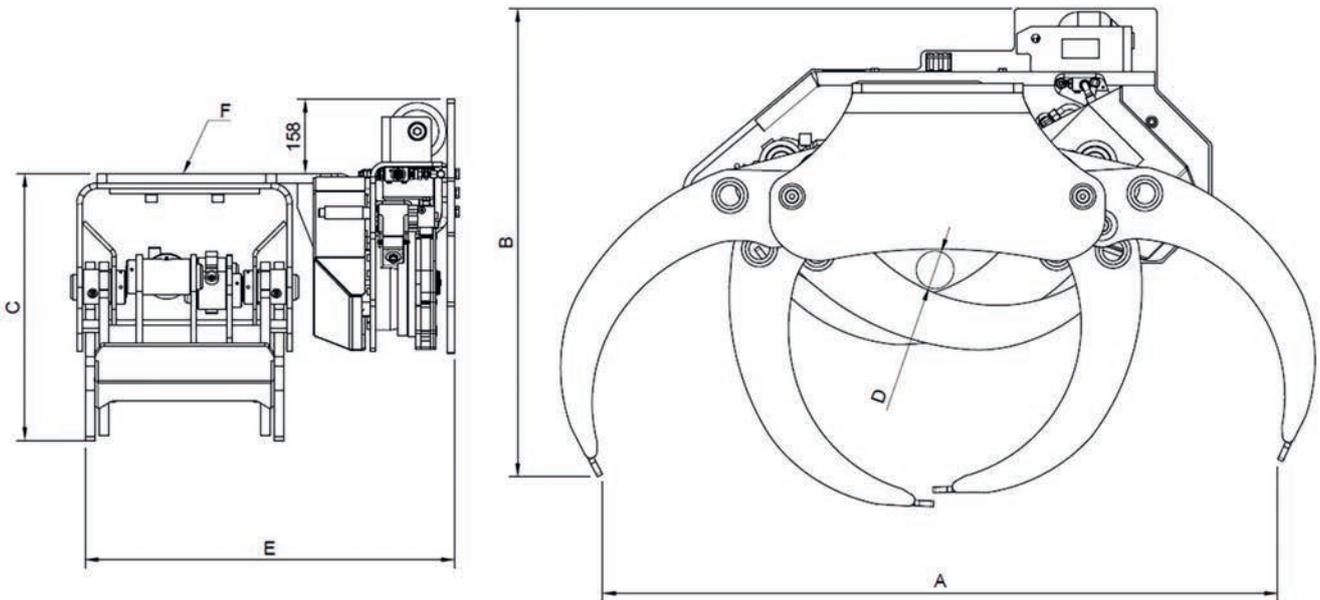

	A	B	C	D	E	F
SS550 GRX 25	1424	990	563	85	779	270 / 16 Ø17 Center Ø145
SS550 GRX 25-4	1385	968	553	85	779	270 / 16 Ø17 Center Ø145
SS550 GRX 25-5	1385	968	553	85	779	270 / 16 Ø17 Center Ø145

MODEL SPECIFICATIONS



MODEL	Kg	mm	Bar	ton	mm			mm	
SS550 GRX 25	441	1424	250	8-12	900	650	404"	2	10 cm ³
SS550 GRX 25 / Teeth	441	1424	250	8-12	900	650	404"	2	10 cm ³
SS550 GRX 25-4	439	1385	250	8-12	900	650	404"	2	10 cm ³
SS550 GRX 25-4 / Teeth	439	1385	250	8-12	900	650	404"	2	10 cm ³
SS550 GRX 25-5	451	1385	250	8-12	900	650	404"	2	10 cm ³
SS550 GRX 25-5 / Teeth	451	1385	250	8-12	900	650	404"	2	10 cm ³



Machine size **14-18** ton

GX Grab made of **Hardox[®] 450** wear-resistant steel

Protection plate made of **Hardox[®] 450**

HULTDINS SUPERSAW 555
Saw cassette - made in Sweden

PARKER motor

Automatic chain lubrication

Automatic chain tensioning

Intergrated chain oil tank

Direct drive

GRAB OPTIONS



GX 28-50/5 / Universal Grab



GX 28-50/7 / Universal Grab



GX 28-50-1000 / Universal Grab

ATTACHMENT OPTIONS



STANDARD
S 45
S 50
S 60



LEHNHOFF
SW08 45
SW10 45
Other models on request



OILQUICK
OQ60-5
Other models on request

**OTHER
ATTACHMENTS
ON REQUEST**

ROTATOR OPTIONS



WORM DRIVE ROTATOR
WDR 14-2 GS



KNIVES OPTIONS



NO KNIVES



WITH KNIVES

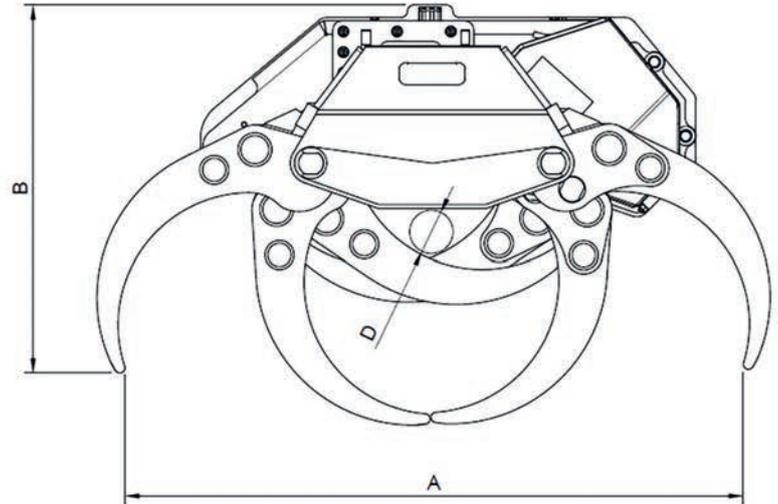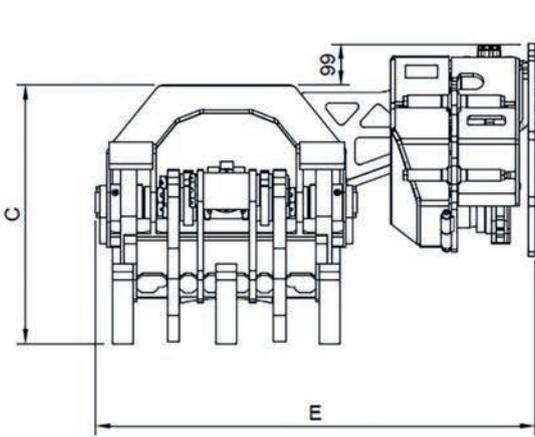

	A	B	C	D	E
SS555 GX 28-50/5	1485	882	658	130	1062
SS555 GX 28-50/7	1471	882	622	100	1130
SS555 GX 28-50-1000	1471	882	622	100	1250

MODEL SPECIFICATIONS

	 Kg	 mm	 Bar	 ton	 mm			 mm	
SS555 GX 28-50/5	774	1485	250	14-18	900	650	404"	2	19 cm ³
SS555 GX 28-50/5 / Knives	779	1485	250	14-18	900	650	404"	2	19 cm ³
SS555 GX 28-50/7	841	1471	250	14-18	900	650	404"	2	19 cm ³
SS555 GX 28-50/7 / Knives	848	1471	250	14-18	900	650	404"	2	19 cm ³
SS555 GX 28-50-1000	854	1471	250	14-18	900	650	404"	2	19 cm ³
SS555 GX 28-50-1000 / Knives	861	1471	250	14-18	900	650	404"	2	19 cm ³



Machine size **18-24** ton

GX Grab made of **Hardox[®] 450** wear-resistant steel

Protection plate made of **Hardox[®] 450**

HULTDINS SUPERSAW 555
Saw cassette - made in Sweden

PARKER motor

Automatic chain lubrication

Automatic chain tensioning

Intergrated chain oil tank

Direct drive

GRAB OPTIONS



GX 36-50/5 / Universal Grab



GX 36-50/7 / Universal Grab

ATTACHMENT OPTIONS



STANDARD
S 60
S 70



OILQUICK
OQ70
Other models on request

OTHER ATTACHMENTS ON REQUEST

ROTATOR OPTIONS



WORM DRIVE ROTATOR
WDR 21-2 GS



KNIVES OPTIONS



NO KNIVES



WITH KNIVES

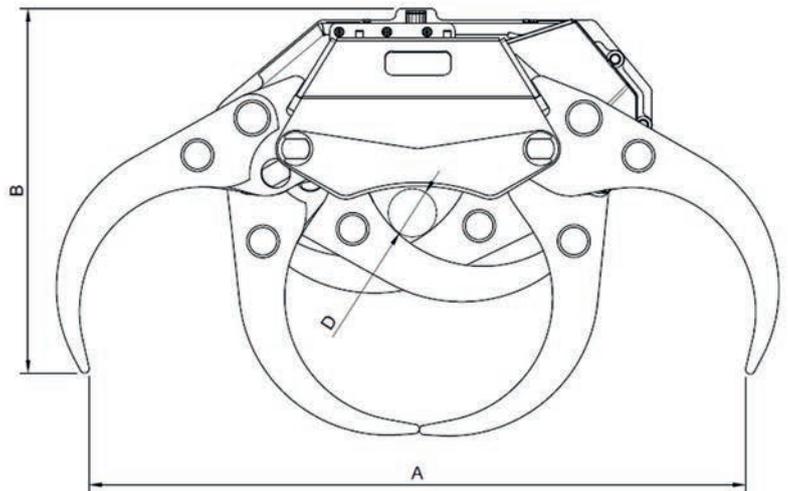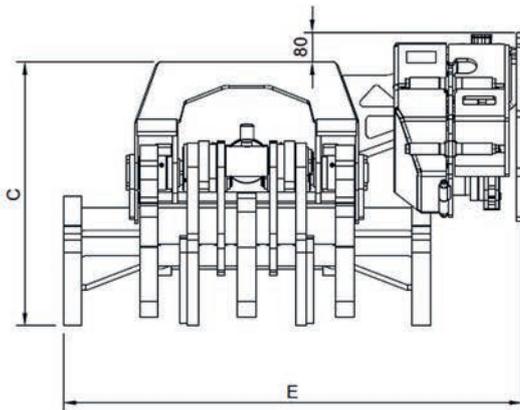

	A	B	C	D	E
SS555 GX 36-50/5	1800	990	720	130	1079
SS555 GX 36-50/7	1800	990	720	100	1250

MODEL SPECIFICATIONS

	 Kg	 mm	 Bar	 ton	 mm			 mm	
SS555 GX 36-50/5	991	1800	250	18-24	900	650	404"	2	19 cm ³
SS555 GX 36-50/5 / Knives	999	1800	250	18-24	900	650	404"	2	19 cm ³
SS555 GX 36-50/7	1124	1800	250	18-24	900	650	404"	2	19 cm ³
SS555 GX 36-50/7 / Knives	1134	1800	250	18-24	900	650	404"	2	19 cm ³

KEY TO SYMBOLS



Weight




Opening width




Maximum working pressure



Recommended excavator weight – rigid mounting



Chain bar length



Chain pitch



Chain link



Motor



Maximum cutting diameter

Technical data, drawings and additional product information in this brochure are not legally binding and can not be used for juridical purposes.

Intermercato AB
Bygatan 5
272 93 Tommarp
Sweden

info@intermercato.com
Tel +46 414 20525

WWW.INTERMERCATO.COM

Your local dealer:

INTERMERCATO®
HIGH PERFORMANCE LIFT & LOAD ATTACHMENTS